

PRODUCT SPECIFICATION

STANDARD COMPLIANCES:

All Category 5e Requirements as Per ANSI/TIA/EIA, ISO/IEC, and CENELEC EN Standards:

ANSI/TIA/EIA 568-B.2 Cat.5e

2nd Edition ISO/IEC 11801 Class D

CENELEC EN 50173-1

IEC 61156-5, CENELEC EN 50288-3-1 Horizontal Cable

Flame Retardancy is Verified According to IEC 60332-1

We Implemented RoHS Compliance for the Requirement of European Union Issued Directive 2002/95/EC



CONSTRUCTION & CHARACTERISTICS:

Conductor	Material / Size	Bare Copper / 24 AWG
Insulation	Material	HDPE
	Thickness	Normal Avg.: 0.201 mm
	Diameter	Normal : 0.91 mm
	Colors	Blue/White-Blue Orange/White-Orange Green/White-Green Brown/White-Brown
	Elongation	Min. 300 %
	Tensile Strength	Min. 1.682 Kg/mm ²
Sheath	Material	PVC
	Thickness	Average: 0.5 mm
	Diameter	5.2±0.3 mm
	Color	Assorted upon request
	Elongation	Min. 100%
	Tensile Strength	Min. 1.407 Kg/mm ²
	Aging at 100°C for 168Hrs	Min. elongation retention:50% Min. tensile strength retention:75%
Marking		CAT.5E UTP SLD CABLE ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2 3P VERIFIED - 24AWGX4P TYPE CM (UL) c(UL) CMH E164469 XXXXXM
		or as customer request.
Flame Test		Burning five times, every time is less than 60 second and paper flag can't be burned.

APPROVALS:

- UL/cUL Listed
- ETL /3P Certified ANSI/TIA/EIA-568-B.2 Category 5e testing safety/performance requirements.

APPLICATIONS:

- 1000BASE-T Gigabit Ethernet
- 10BASE-T, 100BASE-T Fast Ethernet (IEEE 802.3)
- 100 VG - AnyLAN(IEEE802.12), 155/622 Mbps ATM
- 550MHz Broadband Video
- Voice, T1, ISDN


ELECTRICAL PERFORMANCES:

Spark Test	2000 ± 250 V ac			
Dielectric Strength	2500 V dc / 3 seconds			
Insulation Resistance Test	Min. 150 MΩ/Km			
Conductor Resistance	Max.9.38Ω/100m at 20°C			
Resistance Unbalance	Max. 5%			
Capacitance Unbalance	Max. 330 pF/100m			
Mutual Capacitance	Max. 5600 pF/100m			
Impedance	722kHz	102Ω ± 15%		
	1~125MHz	100Ω ± 15%		
Attenuation & Near End Cross Talk	Frequency (MHz)	Attenuation (dB/100M),Max	Next (dB), Min	Power Sum (dB), Min
	772kHz	--	67.0*	64.0*
	1MHz	--	65.0*	62.0*
	4MHz	4.1*	56.0*	53.0*
	8MHz	5.8*	51.0*	48.0*
	10MHz	6.5*	50.0*	47.0*
	16MHz	8.2*	47.0*	44.0*
	20MHz	9.3*	45.0*	42.0*
	25MHz	10.4*	44.0*	41.0*
	31.25MHz	11.7*	42.0*	39.0*
	62.5MHz	17.0*	38.0*	35.0*
	100MHz	22.0*	35.0*	32.0*
	125MHz	25.0*	34.0*	31.0*

The asterisked (*) value are for information only. The minimum NEXT coupling loss for any pair combination at room temperature is to be greater than the value determined using the formula:
 $NEXT(f \text{ MHz}) \geq NEXT(0.772) - 15 \log_{10}(f \text{ MHz} / 0.772)$

CONFIGURATION:

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

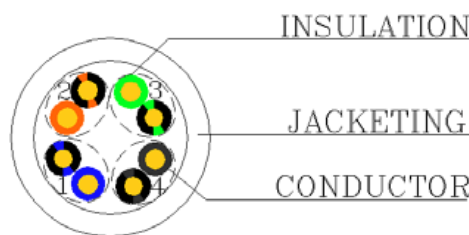

Although every precaution has been taken to ensure the accuracy of the product specifications at the time of publication, we cannot be responsible for the errors, omissions, or changes due to obsolescence. All data contained herein is subject to change without notice.