


# LENKENG Combo Audio Converter

Model Code: LKV3090

Digital to Analog/ Analog to Digital combo audio converter is designed for either home or professional audio switching. It converts coaxial or optical digital audio input to analog stereo output over RCA or 3.5mm mini-jack, and also can convert analog audio signals to digital audio signals, it can convert in either direction.

## Features:

- Supports coaxial or optical digital audio to analog stereo audio
- Supports analog stereo audio to coaxial or optical digital audio
- Supports 2 channels LPCM digital audio signal output
- Supports 32, 44.1, 48, 96, 128 and 192kHz sampling rate when digital to analog, 48kHz sampling rate when analog to digital
- Plug and play

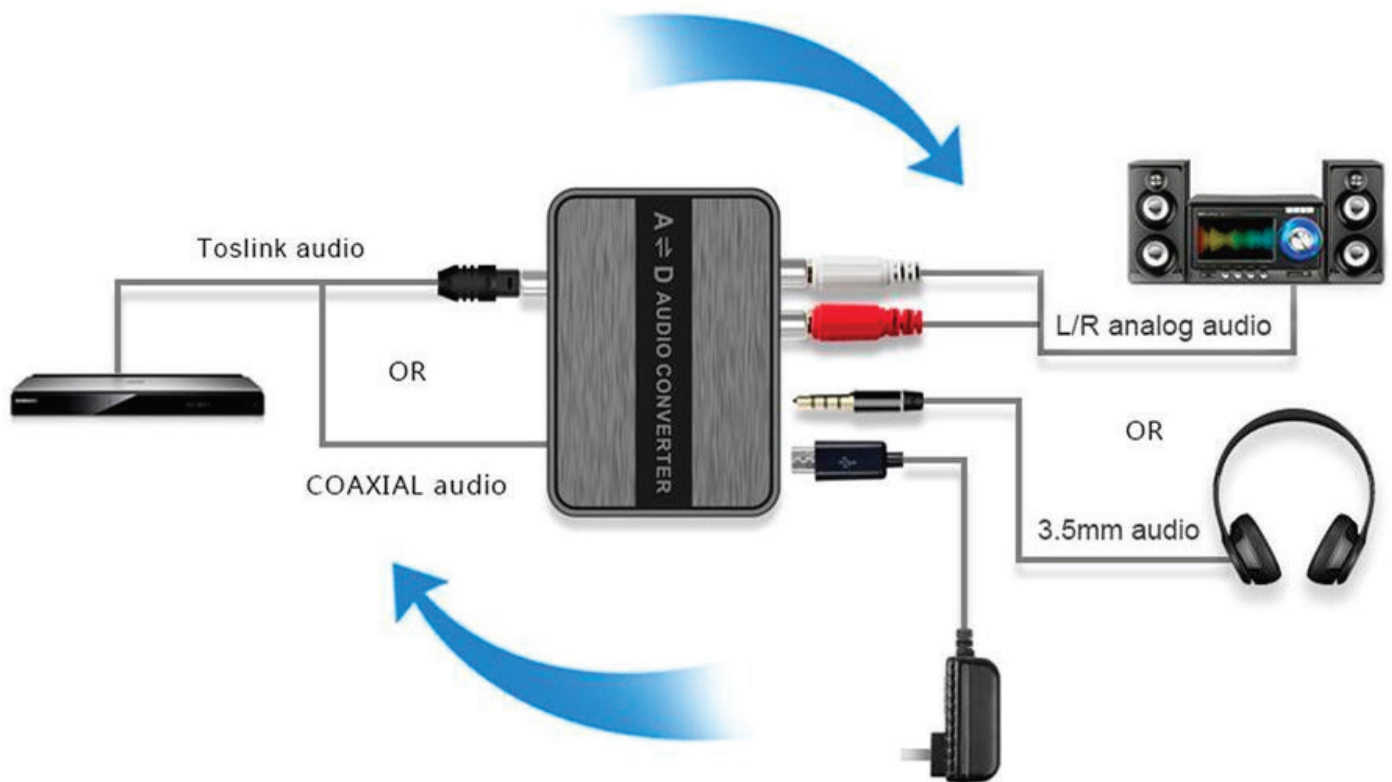



# LENKENG VGA To HDMI Converter

Model Code: LKV3090

Specifications		
Power Supply	Voltage/Current	DC 5V/0.5A
	Power consumption	<1W
	Power port	Micro USB
Technical parameters	Input digital sampling rate	32kHz, 44.1 kHz, 48kHz, 96kHz, 128kHz, 192kHz
	Output digital sampling rate	48kHz
	Analog audio format	Stereo
	I/O interfaces	3.5mm*1, R/L *1, coaxial*1
	Input interfaces	S/PDIF*1
	Output interfaces	S/PDIF*1
Protection Level	Electrostatic protection of the whole machine	1 a Contact discharge level 3
		1 b Air discharge level 3
		Standard: IEC61000-4-2
Operating Environment	Working temperature	0°C ~60°C
	Storage temperature	-10°C~70°C
	Humidity (no condensation)	0%~90% Relative humidity
Body Properties	Dimensions (WxDxH)	61.50 x 55 x 20mm
	Housing	ABS
	Color	Black
	Weight	50g