

Cat5e External Solid Shielded & UV Rated - 350MHz

MODEL CODE	CONDUCTOR	COLOUR	LENGTH
------------	-----------	--------	--------

C-SFTP-SOL R BK	Solid	Black	305M
-----------------	-------	-------	------

CONFIGURATION


- Category 5e UTP Solid cable 24AWGx4P, PE (UV Rated)
- Supplied in pull box

STANDARD COMPLIANCES

- All Category 5e Requirements as Per ANSI/TIA/EIA, ISO/IEC, and CENELEC EN Standards: ANSI/TIA/EIA 568-B.2 Cat.5e 2nd Edition ISO/IEC 11801 CENELEC EN 50173-1 IEC 61156-5, 2nd Edition CENELEC EN 50288-2-1 for Solid Cable

APPROVALS

- UL/cUL Listed

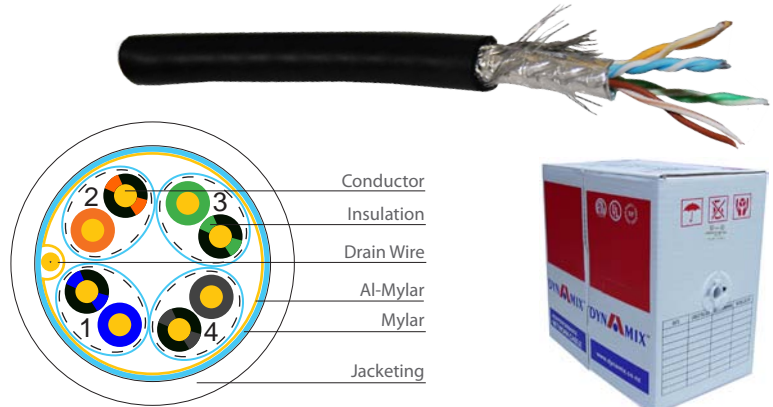

Cat5e Unshielded Gel Filled Solid Cable Roll - 350MHz

MODEL CODE	CONDUCTOR	COLOUR	LENGTH
------------	-----------	--------	--------

C-C5E-SOL GEL	Solid	Black	500M
---------------	-------	-------	------

CONFIGURATION


- Category 5e UTP Solid cable 24AWGx4P, PE + GEL
- In ground cable, supplied on plastic reel

STANDARD COMPLIANCES

- All Category 5e Requirements as Per ANSI/TIA/EIA, ISO/IEC, and CENELEC EN Standards: ANSI/TIA/EIA 568-B.2 Cat.5e 2nd Edition ISO/IEC 11801 CENELEC EN 50173-1 IEC 61156-5, 2nd Edition CENELEC EN 50288-2-1 for Solid Cable

APPROVALS

- UL/cUL Listed

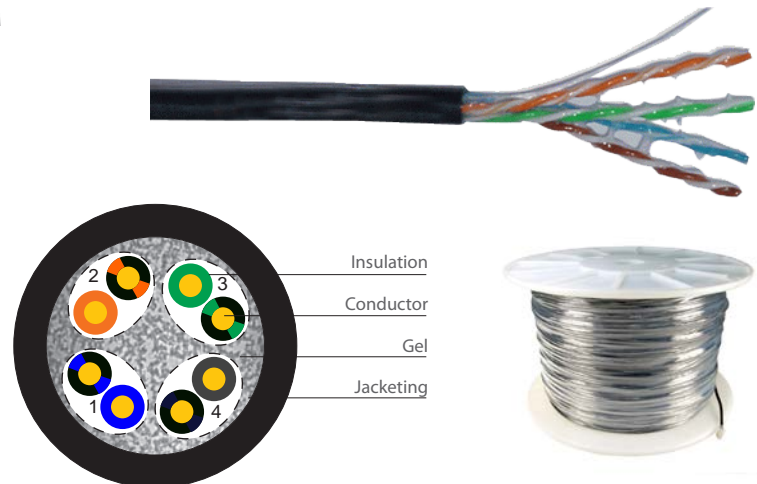

Cat5e Unshielded 2 Pair Stranded

MODEL CODE	CONDUCTOR	COLOUR	LENGTH
------------	-----------	--------	--------

C-C5E 2P BLACK	Stranded	Black	305M
C-C5E 2P BLUE	Stranded	Blue	305M
C-C5E 2P GREY	Stranded	Beige	305M

CONFIGURATION

- Category 5e UTP Stranded cable 24AWGx2P, PVC
- Supplied in pull box

STANDARD COMPLIANCES

- All Category 5e Requirements as Per ANSI/TIA/EIA, ISO/IEC, and CENELEC EN Standards: ANSI/TIA/EIA 568-B.2 Cat.5e 2nd Edition ISO/IEC 11801 Class D, IEC 61156-6, 2nd Edition CENELEC EN 50288-3-2 for Stranded Cable

APPROVALS

- UL/cUL Listed

