

19" Chassis Server Cabinets

FEATURES

- Static Load: 800Kg
- Supplied in fast assembly flat pack format
- Supplied with no doors or side panels
- Includes vertical mounting rails, top panel, adjustable feet and castors
- Black colour
- Material: aluminium frame Other: SPCC cold rolled steel
- Thickness: Mounting profile 2.0mm, Mounting angle: 1.5mm
- Surface finish: Degreasing, phosphoric, powder coated
- Complies with ANSI/EIA RS-310-D, IEC297-2, DIN41494-PART1, DIN41494 standards
- 2 Year Warranty. Subject to use within the static loading specifications, operation within normal environmental conditions


Model Code	WxDxH (External)	Capacity
RC27-6X6FP	600 x 600 x 1349mm	27RU
RC27-6X9FP	600 x 900 x 1349mm	27RU
RC37-6X6FP	600 x 600 x 1774mm	37RU
RC37-6X8FP	600 x 800 x 1774mm	37RU
RC37-6X10FP	600 x 1000 x 1774mm	37RU
RC45-6X6FP	600 x 600 x 2100mm	45RU
RC45-6X8FP	600 x 800 x 2100mm	45RU
RC45-6X10FP	600 x 1000 x 2100mm	45RU
RC45-8X10FP	800 x 1000 x 2100mm	45RU



19" Open Rack Series

FEATURES

- Static loading: 200Kg
- Supplied in fast assembly flat pack format
- Can be bolted to the floor
- Black Colour
- Surface finish: Degreasing, phosphoric, powder coated
- Material Plinth: Angle iron Other: SPCC cold rolled steel
- Thickness: Plinth 6.0mm
- Complies with ANSI/EIA RS310-D, IEC297-2, DIN41491-PART1, DIN41491 GB/T3047.2-92 Standards
- 2 Year Warranty. Subject to use within the static loading specifications, operation within normal environmental conditions and adequate and appropriate mounting installation

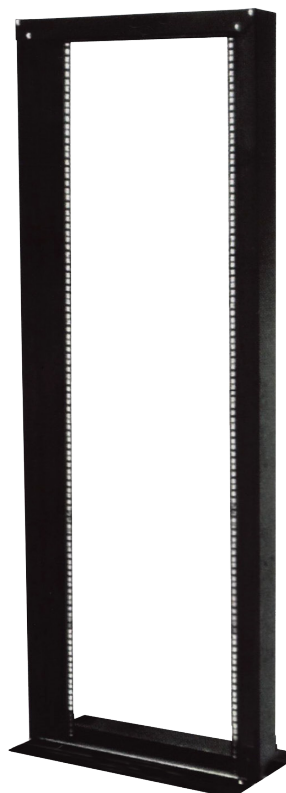

Model Code	WxDxH (External)	Capacity	M3	Kg
NEW ROR22B	543 x 280 x 1130mm	22RU	0.08	16
ROR32B	543 x 280 x 1562mm	32RU	0.10	30
ROR47B	543 x 280 x 2230mm	47RU	0.16	42